

TSW212



Brand: Teltonika
Product Code: TSW212
Availability: 10
Weight: 615.00g
Dimensions: 122.20cm x 132.00cm x 44.20cm

Price: 8,600.00EGP

Short Description

Industrial managed switch 8 x RJ45 ports, 10/100/1000 Mbps

2 x SFP ports

Description

MANAGED ETHERNET SWITCH

TSW212 is an L2 managed Ethernet switch with additional L3 features like DHCPv6, Ethernet/IP, PROfinet, robust long range fibre optic communication, 2 SFP ports to

MANAGED SWITCH

L2 with additional L3 features for advanced management capabilities

PROFINET & MORE

Supports PROFINET for automated data processing alongside other protocols, like Ethernet/IP and MRP

ETHERNET & SFP

8 x Gigabit Ethernet ports and 2 x SFP ports for fiber optic communication


TSWOS

Teltonika Networks OS for switches, intuitively designed for infinite configurations

Specification

Industrial switch	
Profinet	Profinet Class B conformance (available with optional order code)
ETH	Multi-layer managed 8 x ETH ports, 10/100/1000 Mbps supports auto MDI/MDIX crossover
Fibre	2 x SFP ports
IEEE 802.3 series standards	802.3i, 802.3u, 802.3ab, 802.3x, 802.3az
MRP	MRP client role, MRP manager role
L2 features	Loop protection, Forwarding table, VLAN, STP/RSTP
DHCP	DHCP server, DHCP client, DHCP static leases capable of using MAC with wildcards
Port Settings	Enable/disable, link speed control, port isolation, EEE (802.3az) management, Port Mirroring
L3 Features	Static IPv4 routing, static IPv6 routing, DHCPv6 client, static IPv6 address
Supported services	EtherNet/IP, PROFINET (class B), SNMP V2, V3, LLDP, Network Management
QOS	Port priority, DSCP priority, 802.1p priority, TOS
Operating temperature	-40 °C to 75 °C
Operating humidity	5% to 95% non-condensing
Ingress Protection Rating	IP30
Bandwidth (Non-blocking)	20 Gbps
Forwarding rate	14.88 Mpps
Jumbo frame support	10000 bytes

Product Gallery

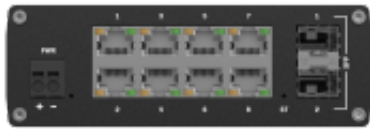

**IMAGE
COMING
SOON!**